

Numerical Simulation and Design


Section 2.8

Non-linear Response Properties

Section 2.9

Forced Vibration with Coulomb Damping

- A single degree-of-freedom system with mass 10 kg, spring stiffness of 1000 N/m and a Coulomb damping coefficient of 0.3 is excited by a harmonic force of 100 N amplitude at 100 rad/s.
- Plot the EXACT response $x(t)$. Assume $x_0 = -0.8683$ mm and $v_0 = 35$ mm/s.

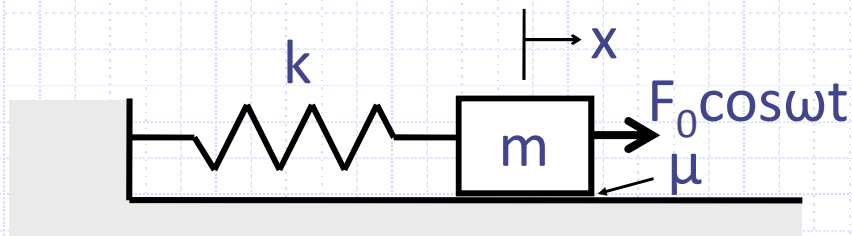

Section 2.8

Numerical Simulation & Design

- Recall that the “state-space” formulation for free vibration $m\ddot{x} + c\dot{x} + kx = 0$

is:

$$\begin{aligned} z_1(t) &= x(t) \\ z_2(t) &= \dot{x}(t) \end{aligned} \xrightarrow{\text{taking derivative wrt time}} \begin{aligned} \dot{z}_1 &= \dot{x} = z_2 \\ \dot{z}_2 &= \ddot{x} = -\frac{k}{m}z_1 - \frac{c}{m}z_2 \end{aligned}$$

Putting into matrix form \rightarrow

$$\begin{bmatrix} \dot{z}_1(t) \\ \dot{z}_2(t) \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -\frac{k}{m} & -\frac{c}{m} \end{bmatrix} \begin{bmatrix} z_1(t) \\ z_2(t) \end{bmatrix}$$

$$\dot{\mathbf{z}} = \mathbf{A}\mathbf{z}$$

Approximating \rightarrow

$$\dot{\mathbf{z}}(t_i) \approx \frac{\mathbf{z}(t_{i+1}) - \mathbf{z}(t_i)}{\Delta t} \rightarrow \mathbf{z}(t_{i+1}) = \mathbf{z}(t_i) + \Delta t \mathbf{A}\mathbf{z}(t_i)$$

Numerical Simulation & Design

- If we include the harmonic force term

$$m\ddot{x} + c\dot{x} + kx = F_0 \cos \omega t$$

it becomes:

$$\begin{aligned} z_1(t) &= x(t) \\ z_2(t) &= \dot{x}(t) \end{aligned} \xrightarrow{\text{taking derivative wrt time}} \begin{aligned} \dot{z}_1 &= \dot{x} = z_2 \\ \dot{z}_2 &= \ddot{x} = -\frac{k}{m}z_1 - \frac{c}{m}z_2 + \frac{F_0}{m} \cos \omega t \end{aligned}$$

Putting into matrix form \rightarrow

$$\begin{bmatrix} \dot{z}_1(t) \\ \dot{z}_2(t) \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -\frac{k}{m} & -\frac{c}{m} \end{bmatrix} \begin{bmatrix} z_1(t) \\ z_2(t) \end{bmatrix} + \begin{bmatrix} 0 \\ \frac{F_0}{m} \cos \omega t \end{bmatrix}$$

$$\dot{\mathbf{z}} = \mathbf{A}\mathbf{z} + \mathbf{f}(t)$$

Approximating \rightarrow

$$\dot{\mathbf{z}}(t_i) \approx \frac{\mathbf{z}(t_{i+1}) - \mathbf{z}(t_i)}{\Delta t} \rightarrow \mathbf{z}(t_{i+1}) = \mathbf{z}(t_i) + \Delta t \mathbf{A}\mathbf{z}(t_i) + \Delta t \mathbf{f}(t_i)$$

Section 2.9

Non-linear Response Properties

- General formulation for any spring and damper forces:

$$\ddot{x}(t) + f[x(t), \dot{x}(t)] = f_0 \cos \omega t$$

- Setting up “state space” numerical time-integration:

$$\begin{array}{lcl} z_1(t) = x(t) & \xrightarrow[\text{wrt time}]{\text{taking derivative}} & \dot{z}_1 = \dot{x} = z_2 \\ z_2(t) = \dot{x}(t) & & \dot{z}_2 = \ddot{x} = -f[z_1, z_2] + f_0 \cos \omega t \end{array}$$

$$\text{Putting into matrix form} \rightarrow \begin{bmatrix} \dot{z}_1(t) \\ \dot{z}_2(t) \end{bmatrix} = \begin{bmatrix} z_2(t) \\ -f(z_1, z_2) \end{bmatrix} + \begin{bmatrix} 0 \\ f_0 \cos \omega t \end{bmatrix}$$

$$\dot{\mathbf{z}} = \mathbf{F}(\mathbf{z}) + \mathbf{f}(t)$$

$$\text{Approximating } \dot{\mathbf{z}}(t_i) \approx \frac{\mathbf{z}(t_{i+1}) - \mathbf{z}(t_i)}{\Delta t} \rightarrow \mathbf{z}(t_{i+1}) = \mathbf{z}(t_i) + \mathbf{F}[\mathbf{z}(t_i)]\Delta t + \mathbf{f}(t_i)\Delta t$$

Non-linear Response Properties

- For Coulomb damping:

$$m\ddot{x}(t) + \mu N \operatorname{sgn}(\dot{x}) + kx = F_0 \cos \omega t$$

- Setting up “state space” numerical time-integration solution:

$$\begin{array}{lcl} z_1(t) = x(t) & \xrightarrow[\text{wrt time}]{\text{taking derivative}} & \dot{z}_1 = \dot{x} = z_2 \\ z_2(t) = \dot{x}(t) & & \dot{z}_2 = \ddot{x} = -\frac{k}{m} z_1 - \frac{\mu N}{m} \operatorname{sgn}(z_2) + \frac{F_0}{m} \cos \omega t \end{array}$$


$$\begin{bmatrix} z_1(t_{i+1}) \\ z_2(t_{i+1}) \end{bmatrix} = \begin{bmatrix} z_1(t_i) \\ z_2(t_i) \end{bmatrix} + \begin{bmatrix} z_2(t_i) \\ -\frac{k}{m} z_1(t_i) - \frac{\mu N}{m} \operatorname{sgn}(z_2(t_i)) \end{bmatrix} \Delta t + \begin{bmatrix} 0 \\ \frac{F_0}{m} \cos(\omega t_i) \end{bmatrix} \Delta t$$

Numerical (Actual) Nonlinear Response compared with Linearized Response

- Actual problem using $F_{damping} = \mu mg \operatorname{sgn}(\dot{x})$ solved numerically
- Linearized problem using $c_{eq} = \frac{4\mu mg}{\pi\omega X}$ solved algebraically.

Forced Vibration with Coulomb Damping

k	1000 N/m
m	10 kg
μ	0.3
F₀	100 N
g	9.81 m/s ²
ω	100 rad/s

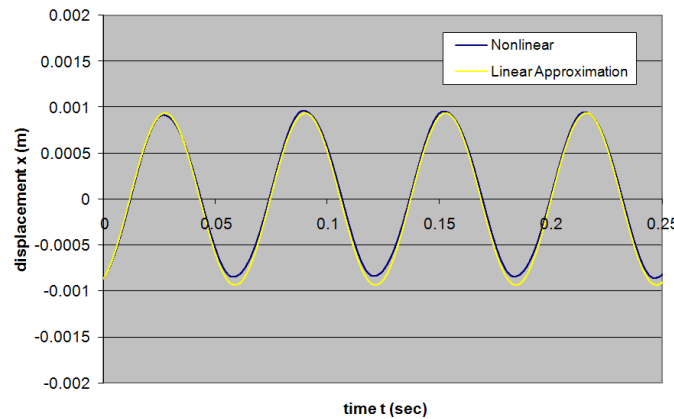


Numerical (Actual) Nonlinear Response compared with Linearized Response

- Same as above with higher friction coefficient.


Forced Vibration with Coulomb Damping

k	1000 N/m
m	10 kg
μ	0.6
F₀	100 N
g	9.81 m/s ²
ω	100 rad/s

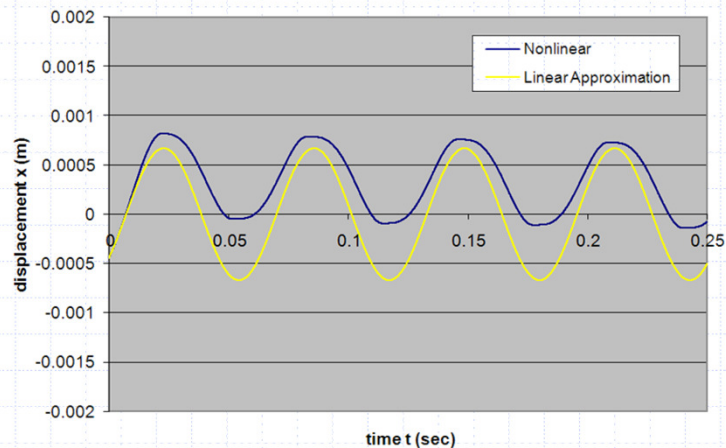


Comparing Actual Nonlinear Response with Linearized Response

- Non-linear spring ($F_{spring} = kx - k_1x^3$) versus linear spring ($F_{spring} = kx$)

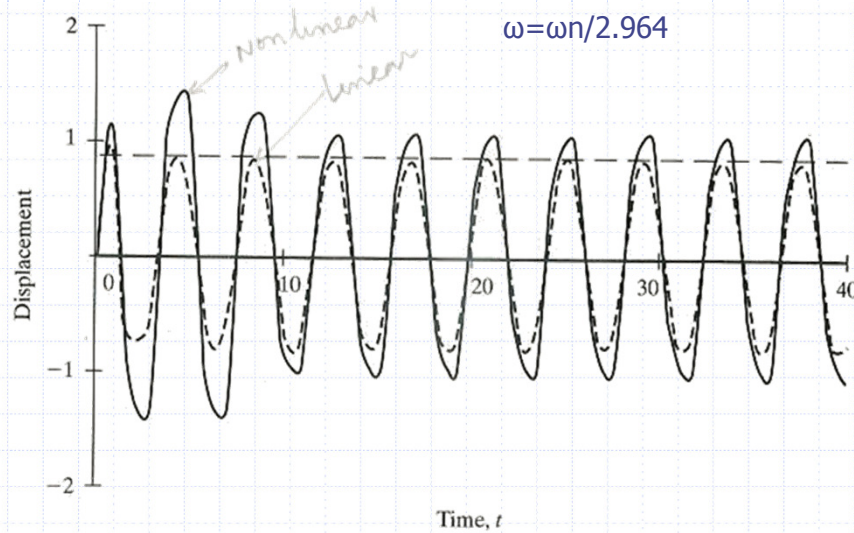


Comparing Actual Nonlinear Response with Linearized Response

- Non-linear spring ($F_{spring} = kx - k_1x^3$) versus linear spring ($F_{spring} = kx$)

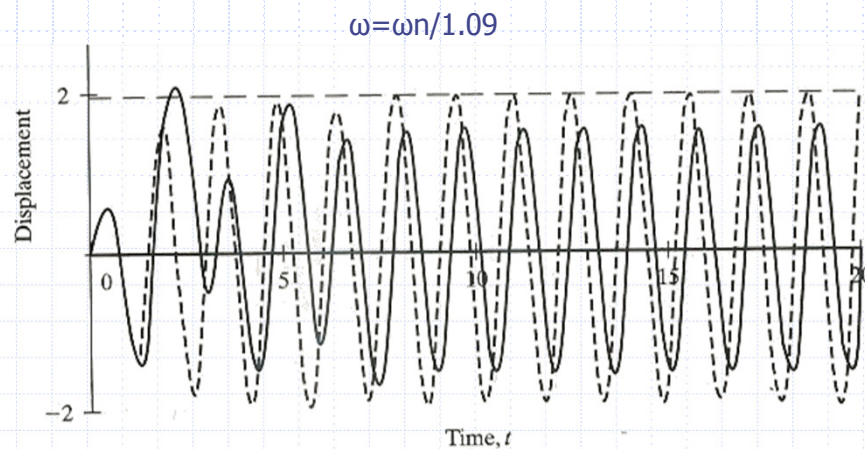

Comparing Actual Nonlinear Response with Linearized Response

- Displacement-squared damping ($F_{damping} = \alpha \text{sgn}(\dot{x})\dot{x}^2$) versus use of c_{eq} ($c_{eq} = \frac{4dX}{3\pi\omega}$)

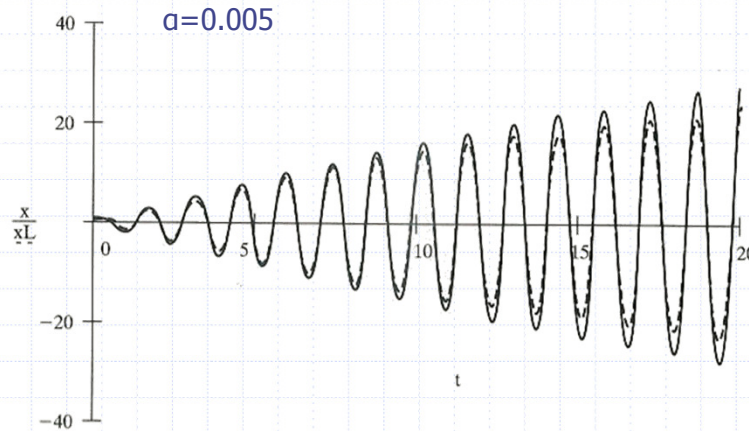

Comparing Actual Nonlinear Response with Linearized Response

- Displacement-squared damping ($F_{damping} = \alpha \text{sgn}(\dot{x})\dot{x}^2$) versus use of c_{eq} ($c_{eq} = \frac{4dX}{3\pi\omega}$)

